

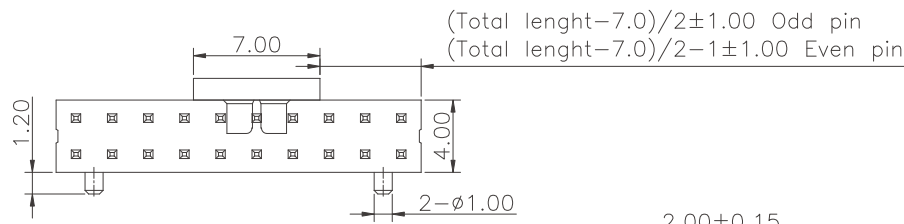
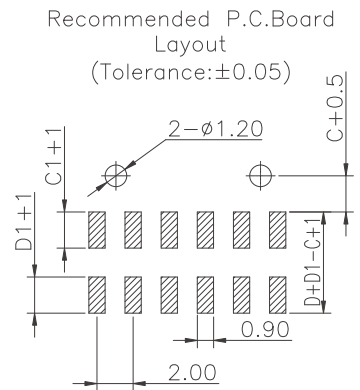

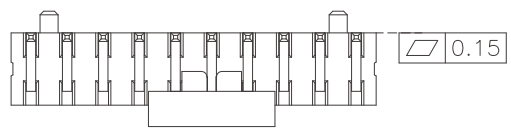


1 2 3 4 5 6 7 8 9

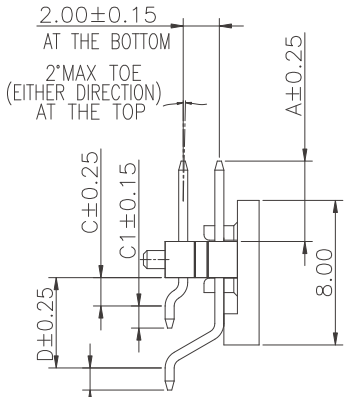

Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:
 Brass(Pin length less than 25mm)
 Phosphor Bronze(The total length of pin is more than 25mm)
 Insulator Material:
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greenconn hazardous substances control standards.

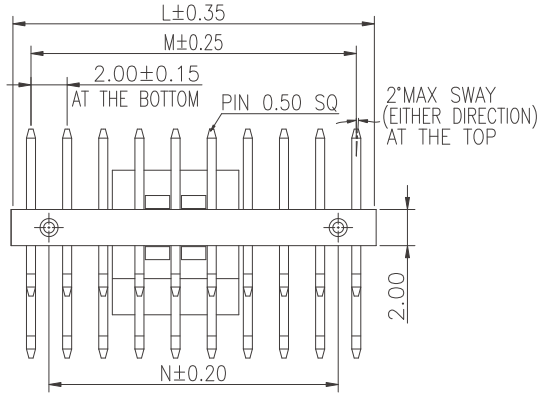

No. of PIN/ROW	Dimension Information		
	M	L	N
02	2.00	4.20	
03	4.00	6.20	2.00
04	6.00	8.20	4.00
05	8.00	10.20	6.00
06	10.00	12.20	8.00
07	12.00	14.20	10.00
08	14.00	16.20	12.00
09	16.00	18.20	14.00
10	18.00	20.20	16.00
11	20.00	22.20	18.00
12	22.00	24.20	20.00
13	24.00	26.20	22.00
14	26.00	28.20	24.00
15	28.00	30.20	26.00
16	30.00	32.20	28.00
17	32.00	34.20	30.00
18	34.00	36.20	32.00
19	36.00	38.20	34.00
20	38.00	40.20	36.00
21	40.00	42.20	38.00
22	42.00	44.20	40.00
23	44.00	46.20	42.00
24	46.00	48.20	44.00
25	48.00	50.20	46.00
26	50.00	52.20	48.00
27	52.00	54.20	50.00
28	54.00	56.20	52.00
29	56.00	58.20	54.00
30	58.00	60.20	56.00
31	60.00	62.20	58.00
32	62.00	64.20	60.00
33	64.00	66.20	62.00
34	66.00	68.20	64.00
35	68.00	70.20	66.00
36	70.00	72.20	68.00
37	72.00	74.20	70.00
38	74.00	76.20	72.00
39	76.00	78.20	74.00
40	78.00	80.20	76.00

Ordering Information

G PFD201 - XX XX A XXX C 1 A X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 02~40

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Insulator Material
 R=Nylon(Halogen Free)
 C=LCP

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze
 B/Z/H/W=Brass

Packing code
 A=Box
 B=Tray
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

赣州市创盟电子科技有限公司 REV. 01 UNIT. mm SCALE. 2:1 PAGE. 1/1					GENERAL TOLERANCE		DWG. NO. GPF201-CBXX	TITLE. 2.00 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR
					X.*±5.0°	X.±0.30		
X.*±3.0°	X.±0.25							
.XX*±2.0°	.XX±0.15							
.XXX*±1.0°	.XXX±0.10							

1 2 3 4 5 6 7 8 9